


ADVANTEST®

U3641/3641N
Spectrum Analyzer

For Field Maintenance of CATV and
Digital Mobile Communication Systems



U3641/3641N

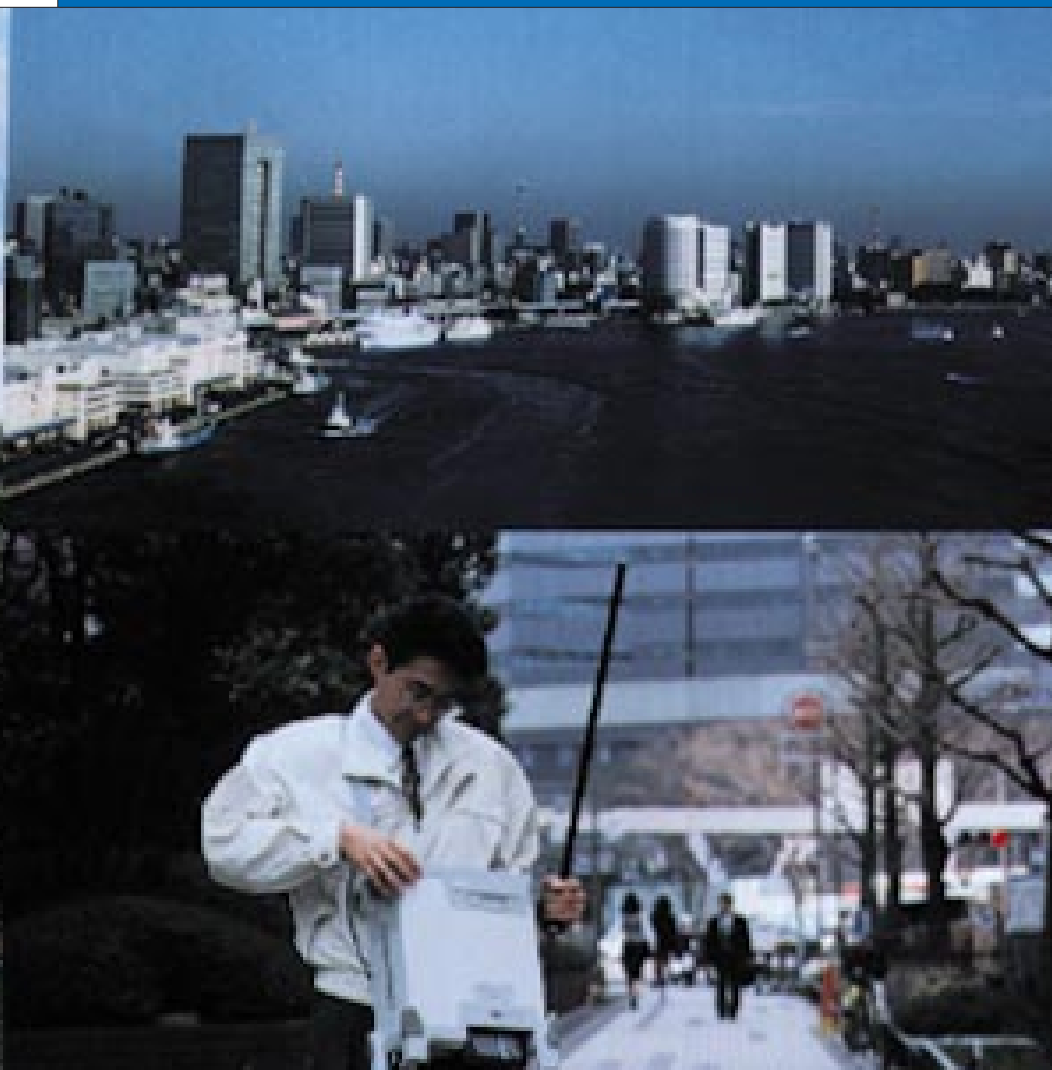

Light Weight, Compact, Battery Operated Spectrum Analyzer

Frequency Range: 9 kHz to 3 GHz



The U3641/3641N is a 3-GHz synthesized spectrum analyzer ideal for field use. With a light weight, compact size and three-way power supply including battery operation, the U3641/3641N has been designed specifically for field installation and maintenance applications. In addition, with the inclusion of a synthesized local oscillator, the U3641/3641N allows high-precision and high-stability measurements with a minimum resolution bandwidth of 100 Hz. A fast zero span sweep speed of 50 μ s allows characterization of burst signal rising and falling edges and the measurement of power during on and off periods.

The U3641/3641N can be customized for a variety of applications by selecting from the wide range of available options. The U3641/3641N is a portable spectrum analyzer which can be used for maintenance on various aspects of CATV and digital mobile communication systems.

Option Guide

	Option No.	Function
Controller	OPT15	Activate separate application software.
High-stability reference source	OPT20	High-stability reference oscillator with an aging rate of $\pm 2 \times 10^{-8}$ /day
Narrow RBW	OPT26	100Hz and 300Hz resolution bandwidth can be set
CDMA	OPT60	Allows channel power, ACP, OBW, and spurious emission (in-band) measurement.
TV demodulation	OPT72	Frequency tuning function by channel input, image/audio demodulation function
Tracking generator	OPT74	Filter evaluation function/LOSS measurement function for the frequency range from 100 kHz to 2.2 GHz
Channel input setting	OPT78	VHF, UHF, CATV, BS, CS channels of various countries and user channel can be set

The U3641/3641N Accommodates Narrow-Band Wireless Systems

- **Ultra-compact and light weight**
Main unit: 6.9 kg or less
With battery: 9 kg or less
- **Frequency range: 9 kHz to 3GHz**
- **Display dynamic range: 100 dB**
- **Three-way power supply with battery operation (100/200 VAC, external DC, and battery pack)**
- **1.5-hour operation is possible with the specialized battery**
- **TFT 6-inch color LCD and memory card**
- **High-stability measurement by means of synthesized operation**
- **50- μ s high-speed sweep function**
- **Diverse options and series including**
TV image/audio demodulation, tracking generator, high-stability reference source, narrow RBW, channel input setting, controller, input impedance of 50 ohms (U3641) or 75 ohms (U3641N), CDMA Measurement
- **Variety of measurement functions**
20-dB gain preamplifier, 1-Hz resolution counter, occupied frequency bandwidth, adjacent-channel leakage power, and audio monitoring



U3641 Spectrum Analyzer

Full Range of Features for Portability and


At 6.9 kg (Max.), the Lightest Field Analyzers in Their Class

The U3641/3641N are light and compact (6.8kg or less without the battery pack or 9 kg or less with the pack). The easy-to-attach strap allows the analyzer to be worn on the shoulder and easily carried. The U3641/3641N are rugged enough to satisfy the requirements of vibration, shock and drop tests, allowing them to be used safely under harsh field conditions.



Battery Provides 1.5 Hours of Operation. Three Power Sources to Choose From

The U3641/3641N operate not only on 100/200 V AC power but also on +10 to +16 V DC power or the battery pack. The battery pack can be easily attached or removed. It allows 1.5 hour continuous operation at a full charge, making it easier to perform logistically wide-ranging measurements such as maintenance and installation work. Rapid two- hour battery charging time.

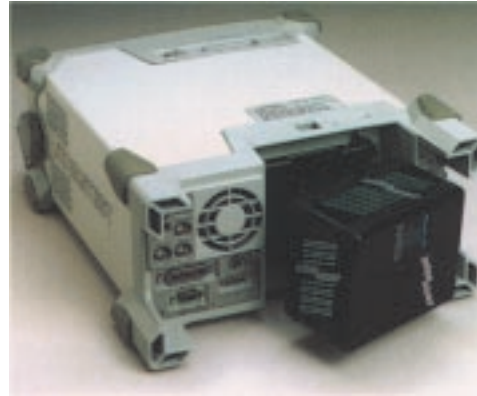

Large Color TFT LC Display

The U3641/3641N employ a 6 inch color TFT LCD display and a tilt mechanism that allows a angle of ± 15 degrees, remarkably improving the visibility and efficiency of analysis work.



2 Memory Card Slots


The U3641/3641N are equipped with two standard memory card slots conforming to JEIDA-Ver.4.1/PCMCIA Rel.2.0. With two memory card slots for saving, recalling the panel settings and storing the measured data, the U3641/3641N's operation becomes a simple task. (SRAM cards are available as optional accessories.) The slots have a dust-proof shutter and a memory card ejection mechanism for reliable operation even in difficult outdoor working conditions.



Wide Array of Analysis Functions

Along with basic functions such as a frequency counter with a 1 Hz resolution and a 20 dB gain preamplifier, the U3641/3641N comes standardly equipped with analysis functions for measuring items such as dB down (required for radio equipment evaluation), third order intermodulation distortion, AM modulation, occupied bandwidth, and adjacent channel leakage power. GO-NO GO evaluations of the displayed waveform can also be easily performed using the limit line and PASS/FAIL functions which allow upper and lower limits to be set on the screen.


Using the user define function, commonly used menus or other items can be freely assigned to function keys, allowing the user to create custom easy-to-use menu.

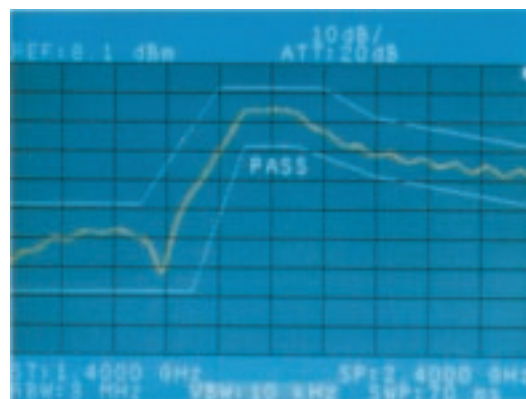

PASS/FAIL evaluation using upper and lower limit line

I/O Interfaces

GPIB and RS-232C interfaces allow not only printouts, but also simple integration in remote controlled and automated control systems. Video output enables creation of a screen hard copy, and long term video recording, useful for examinations of intermittent interference, which is only generated occasionally.

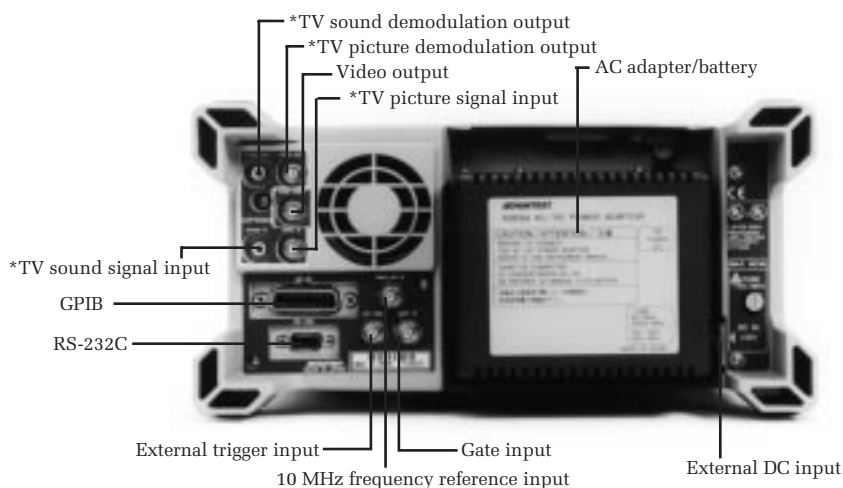


Rear panel

*For option 72 only

Measurement of occupied frequency bandwidth

The U3641/3641N calculates the bandwidth for the specified power ratio from measured spectrum data and then displays it with the marker. In addition, it displays the occupied frequency bandwidth (OBW) and carrier frequency (FC) at the upper left portion of the screen. The ratio of the obtained power to the total power can be specified in the range from 10.0 to 99.8%.

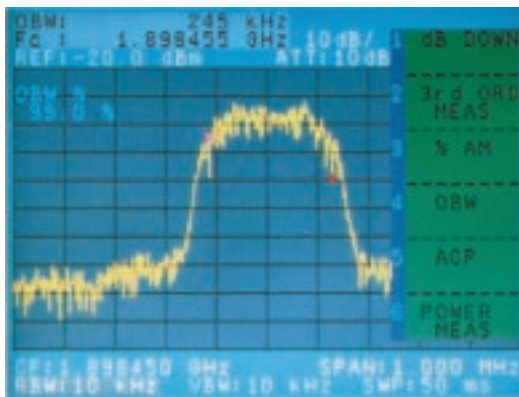


Measurement of adjacent-channel leakage power

The U3641/3641N obtains the total power from the measured data on the screen. Then it integrates the power with respect to the specified bandwidth (BS) to obtain its ratio to total power. Two measurement methods can be selected:

ACP POINT: Obtains the leakage power of the upper and lower channels at the specified channel interval and displays them in numerical forms.


ACP GRAPH: Obtains the leakage power of the specified bandwidth (BS) with respect to all frequency points and overlaps it onto the spectrum data.

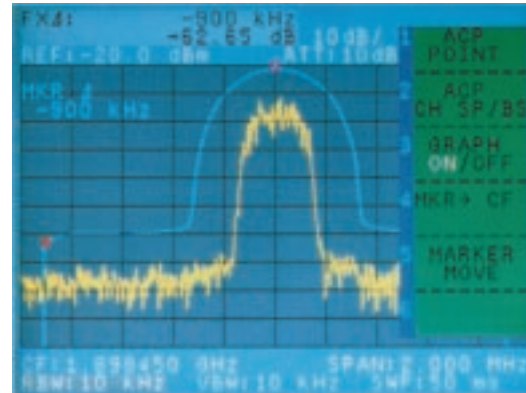

Power measurement functions


Average power

The modulation modes used for digital mobile communication systems handle signals with large amplitude variation. Therefore, an average power calculation function is incorporated, allowing power measurement for signals with amplitude variation.

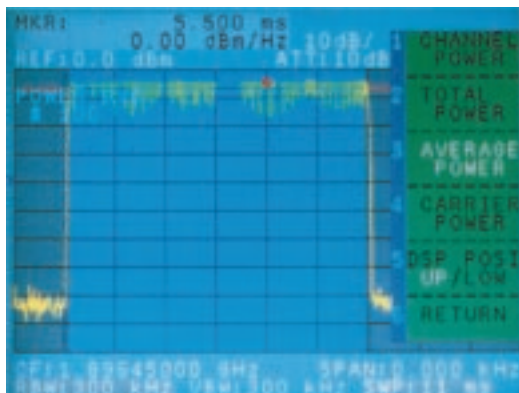

Total power


For Spread spectrum signals, used in CDMA or middle-rate wireless LAN, the total power measurement function is crucial. This function includes two modes: one is the channel mode which measures the in-band power specified from the measuring window and the other is the total power mode which measures the total power over the entire measurement span.

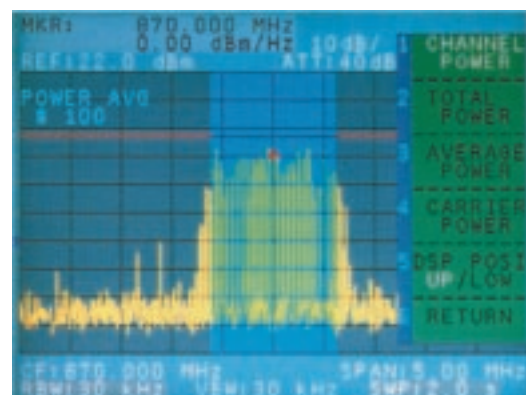

modate Digital Mobile Communications


High-speed sweep function

In ZERO SPAN mode (fixed tuning mode without frequency sweep), the sweep time can be set up to 50 μ s. This makes it possible to observe TDMA waveforms for digital mobile communication systems and perform detailed analysis through magnified display of burst rising and falling waveforms.

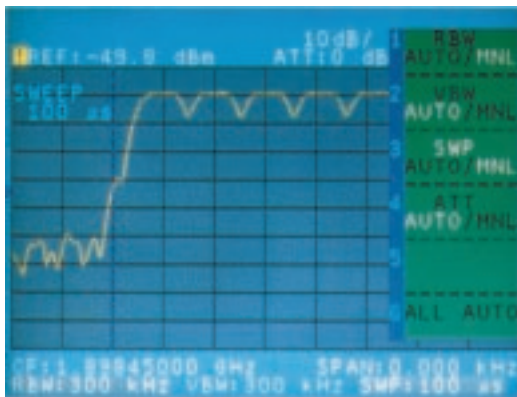

TV signal measurement


The U3641/3641N sweep can be triggered by means of TV vertical or horizontal sync signals. For horizontal sync triggering, the line number can be specified.

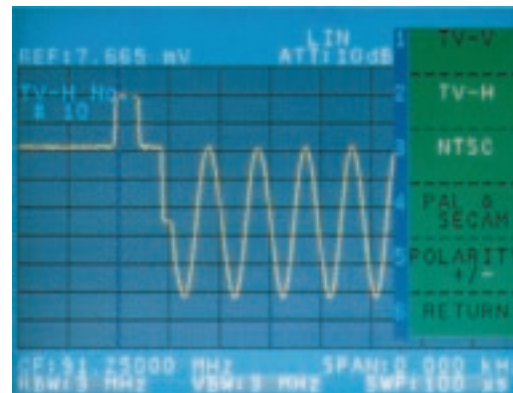

**Narrow
RBW**
(Option 26)

The U3641/3641N Allows Analysis of Narrow Band Signal and Measurement of Sideband Noise

In addition to 1 kHz to 3 MHz RBW, 300 Hz and 100 Hz are also available as options. This allows measurement of sideband noise without influence from the carrier for narrow band wireless systems. Also, a 10 kHz offset signal for a TV broadcasting signal can be resolved, allowing accurate measurement of the DU ratio (Desired signal to Undesired signal Ratio).

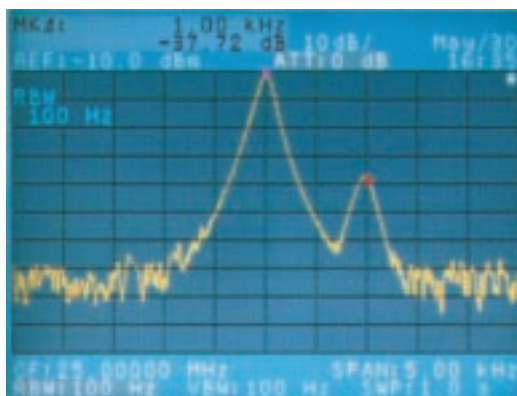


**Channel
input setting**
(Option 78)

The U3641/3641N Allows Channel Setting for Communication Systems of Major Countries

Most communication systems employ the FDMA(Frequency Division Multiple Access) method. When observing the signals using the U3641/3641N, each carrier frequency band to be measured can be registered in the built-in table as a user channel. This allows the center frequency to be called by means of the channel number, resulting in improved work efficiency.


Channel numbers from 1 to 99 can be registered and two tables are provided. For TV broadcasting wave, frequencies are preset according to the VHF, UHF, CATV BS, and CS band designations of major countries.

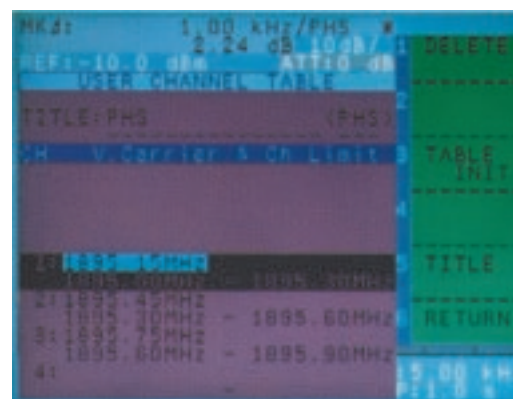

Wide Array of Analysis Functions


1 Hz Resolution Frequency Counter

Just by adjusting the counter marker to the spectrum, the U3641/3641N can display a frequency counter with a minimum resolution of 1 Hz. This function is extremely useful in multi-carrier frequency measurements, such as mobile radio or CATV systems, which are difficult with conventional frequency counters.

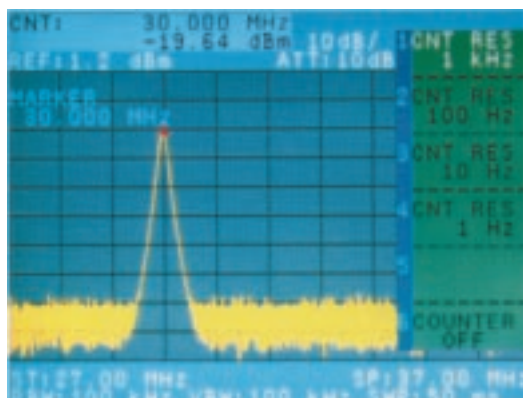


AM Modulation Degree Measurement

The U3641/3641N allows the user to display the AM modulation depth at the touch of a button without performing complicated calculations.

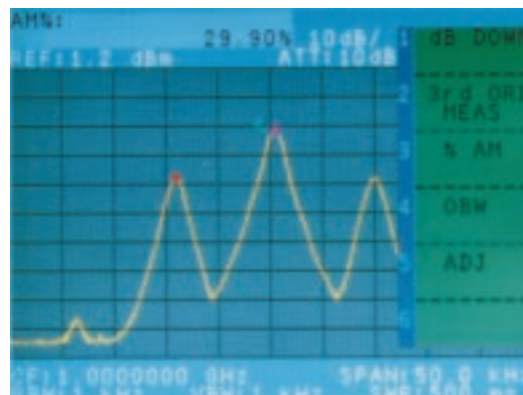

20 dB Gain Preamplifier


The U3641/3641N have a built-in preamplifier with a 20 dB minimum gain over a 9 kHz to 3.05 GHz range (U3641)/100kHz~2.2GHz range (U3641N). This feature enables analysis of signals at extremely low levels such as -130 dBm or less.

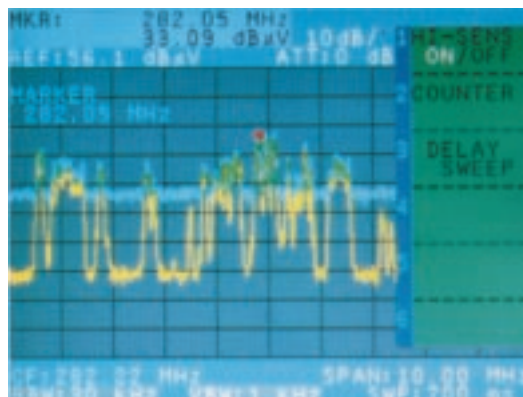

Dynamic range of measurement expanded by preamplifier ON

dB Down Measurement


The U3641/3641N can display the frequency difference and level difference between a reference marker and a marker X dB below.

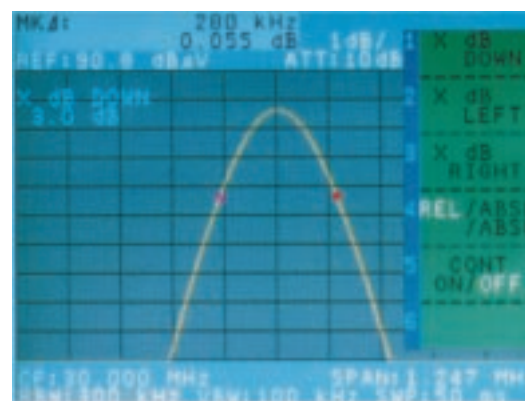

Ideal For Analysis of TV Transmissions

TV Channel Input

Selecting the TV KEY provides channel input frequency tuning. VHF, UHF, CATV, BS and CS channel tables are prestored in the base memory, and these tables can be customized by users. The marker function allows channel band display as well as frequency/level indication.

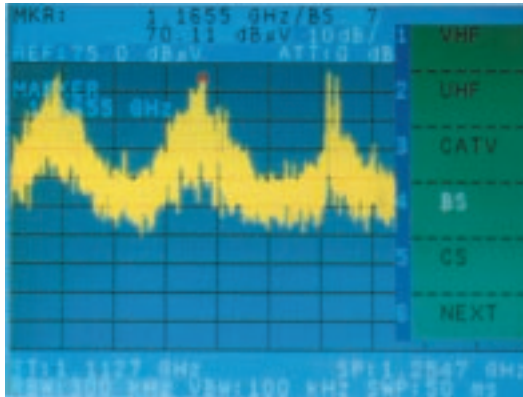

Picture/Sound Demodulation



The PICTURE KEY switches from a spectrum display to a TV image display. Sound demodulation is provided simultaneously to compare easily the spectrum waveform and the images.

The equipment can be used as a demodulator for arbitrary frequencies as in a TV relay station's IF bands or CATV uplink image checking.



TV picture demodulation

TV demodulation option (Option 72) covers worldwide TV standards: NTSC, PAL and SECAM colors and M, B/G, D/K/K', I and L/L' systems are selectable.

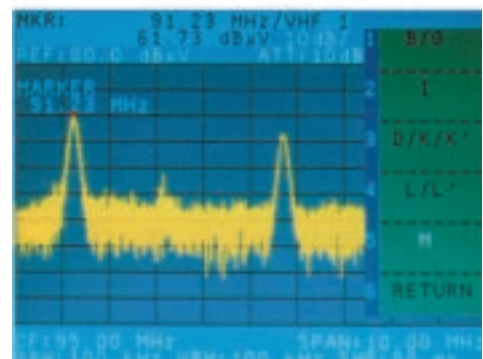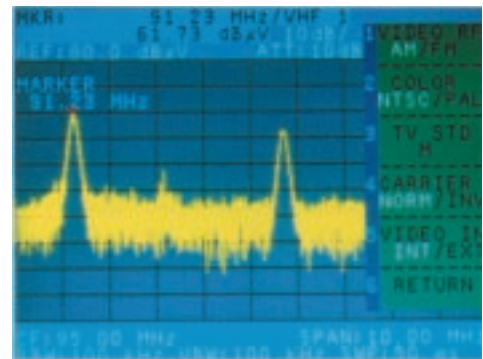

For CDMA (IS-95/J-STD-008) Tx Measurement

Addition of the CDMA option (OPT60) to the U3641 Spectrum Analyzer enables easy one button measurement of CDMA transmission characteristics specified by IS-95/J-STD-008. Option 60 allows CDMA spectrum measurements for both base stations and mobile stations, at cellular or PCS frequencies. The standard internal pre-amp of the U3641 is indispensable for high sensitivity field measurement. This sensitivity, combined with the U3641's compact, lightweight, battery-driven design makes the unit ideal for field use.

- Automatic internal setting of CDMA parameters
- High stability CDMA channel power measurement function
- High sensitivity power measurement possible with the built-in pre-amp
- Multiple CDMA system channels supported

Measurement Items

- Channel Power measurement
- Occupied Bandwidth measurement
- Adjacent Channel Power (Spectrum Mask) measurement.
- Spurious Emission (In-Band) measurement




High Stability and High Sensitivity CDMA Channel Power Measurement

- High Stability Power Measurement
Absolute accuracy : $\leq \pm 2.0\text{dB}$ (15 to 30 °C)
 $\leq \pm 2.5\text{dB}$ (0 to 30 °C)
Relative accuracy : $\leq \pm 0.5\text{dB}$ (15 to 30 °C)
 $\leq \pm 0.8\text{dB}$ (0 to 50 °C)


(after CAL execution, automatic setting, Pre-amp off, -50dBm/1.23MHz to +20dBm/1.23MHz, within 80dB display range.)

- High Sensitivity Power Measurement
Pre-amp on: -25 to -90dBm/1.23MHz(Typ.)

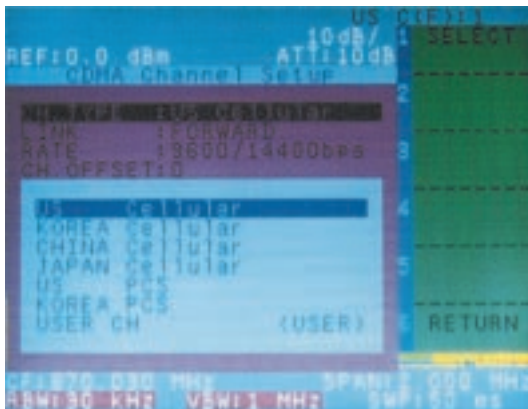


Channel Tables for CDMA Systems

- Center frequency set by channel number (US-Cellular, KOREA-Cellular, CHINA-Cellular, JAPAN-Cellular, US-PCS, and KOREA-PCS channels supported)
- FORWARD/REVERSE channels supported
- Channel number offset allowed
- User table for up to 99 channels

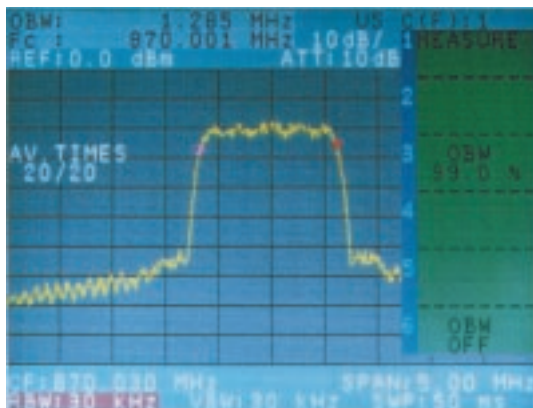

OBW Measurement

- Single-operation measurement of frequency bandwidth (OBW) occupying 99% of the power
- Occupancy variable from 10% to 99.8%
- 2 to 999 times averaging
- REVERSE mode measurement corresponding to each rate (9600/14400, 4800/7200, 2400/3600, 1200/1800)

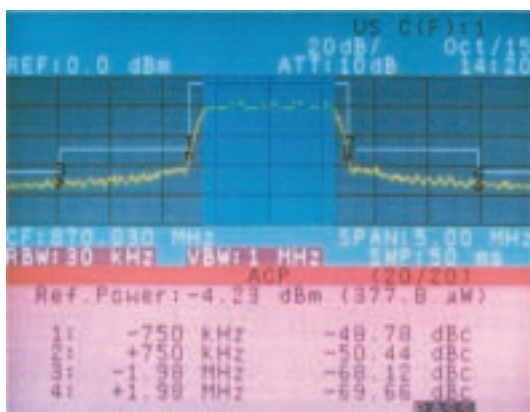


ACP (SpectrumMask) Measurement

- ACP (dBc) measurement at each offset frequency according to standard, referenced to Tx power

Offset Frequency	FORWARD	REVERSE
IS-95	±750kHz, ±1.98MHz	±900kHz, ±1.98MHz
J-STD-008	±885kHz, ±2.5MHz	±1.25MHz, ±2.5MHz

- Spectrum Mask pass/fail judgment to IS-95 and J-STD-008 standard templates
- Posi/Sample detection selection

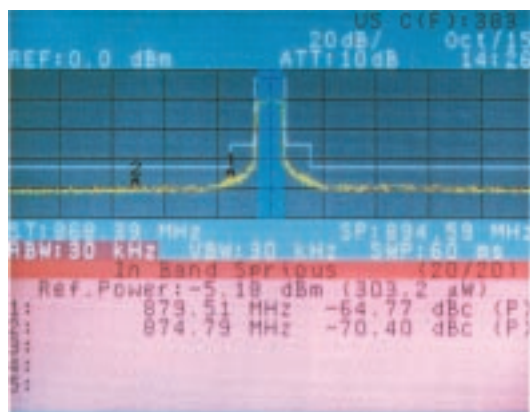


Spurious Emission (In-Band) Measurement

- Relative (dBc) measurement simultaneous with Tx power measurement
- Pass/Fail judgment with peak list display to IS-95 and J-STD-008 standard templates
- Posi/Sample detection switching
- Automatic setting of in-Band frequency for each CDMA system

Frequency Characteristics Evaluations of Filters and Amplifiers


Tracking generator option (Option 74) can generate a sine wave signal in synch to the frequency sweep of a spectrum analyzer in a range of 100 kHz to 2.2 GHz, enabling direct measurement of frequency characteristics.

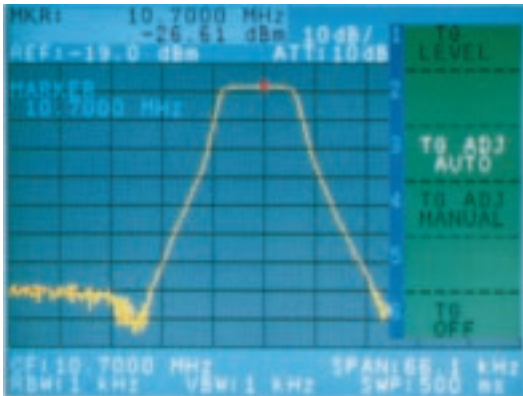

Characteristic analysis of band pass filter


Impedance Matching Measurement

With an SWR bridge (optional accessory), Tracking generator option (Option 74) can measure return loss, enabling simple evaluation of DUT impedance matching.
Recommended SWR Bridge: ZRB2VAR-52/53/73 (ROHDE & SCHWARZ)

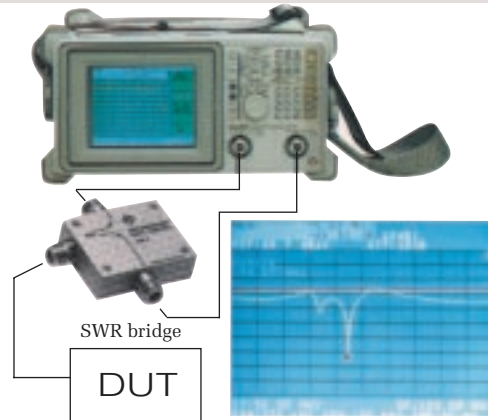


Circuit Network Loss Measurement

Tracking generator option (Option 74) can easily measure the insertion loss of high frequency devices and equipment, or their connected cables, in a wide frequency range of 100 kHz to 2.2 GHz.

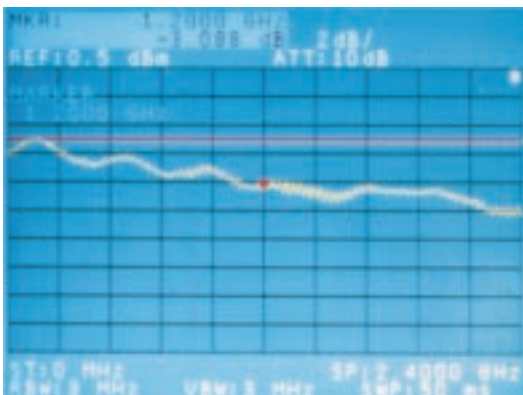

Normalization Function Enables High Precision Measurement

When used with a tracking generator, Tracking generator option (Option 74) have a normalization function which cancels out all frequency characteristics of the measuring devices. This function allows characteristics evaluation to be made of only the DUT.

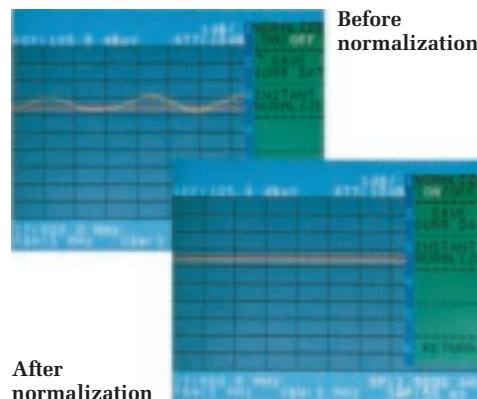

Specifications

Frequency	
Frequency Range	9 kHz to 3.0 GHz
Frequency Readout Accuracy	Start, Stop, CF, Marker $\pm (\text{freq readout} \times \text{freq ref error} + 5\% \times \text{span} + 15\% \times \text{RBW} + 10 \text{ Hz})$
Count Frequency Marker Resolution	1 Hz to 1 kHz
Count Accuracy	$\pm (\text{marker freq} \times \text{freq reference accuracy} + 1 \text{ LSD} \pm 5 \text{ Hz})$
Accuracy	(S/N $\geq 25 \text{ dB}$, RBW $\geq 3 \text{ kHz}$, $1 \text{ kHz} \leq \text{SPAN} \leq 200 \text{ MHz}$)
Frequency Reference Accuracy	$\pm 2 \times 10^{-6}/\text{year}$ $\pm 1 \times 10^{-5}$ (at 0°C to 50°C)
Frequency Span Range	1 kHz to 3.2 GHz, ZERO span
Accuracy	$\leq \pm 5\%$
Frequency Stability Residual FM	$\leq 60 \text{ Hz}_{\text{P-P}}/100 \text{ ms}$ (ZERO span, RBW = 100 Hz)
Frequency Drift	$< 150 \text{ Hz}/\text{min}$ (SPAN $\leq 10 \text{ kHz}$) After warm up 30min, At stable temperature
Noise Sidebands	$\leq -105 \text{ dBc}$, at 20 kHz offset $\leq -100 \text{ dBc}$, at 10 kHz offset
Resolution Bandwidth Range	(3 dB) 1 kHz to 3 MHz 1–3 sequence 100 Hz, 300 Hz (OPT.26)
Bandwidth Accuracy	$\leq \pm 20\%$ (1 kHz to 1 MHz) $\leq \pm 25\%$ (3 MHz)
Selectivity	$< 15:1$ (60 dB : 3 dB, 1kHz to 3MHz)
Video Bandwidth	10 Hz to 3 MHz (1–3 step)

Amplitude Range	U3641	U3641N
Amplitude Range	+20 dBm to displayed Average Noise Level	+130 dBμV to displayed Average Noise Level
Maximum Input Level	$\pm 50 \text{ V DC max.}$	
Preamplifier OFF (Input atten $\geq 10 \text{ dB}$)	+27 dBm	+134 dBμV
Preamplifier ON (Input atten $\geq 10 \text{ dB}$)	+13 dBm	+120 dBμV
Display Range	Log 10 × 10 div 10, 5, 2, 1 dB/div Linear 10% of reference level/div, RBW $\geq 3 \text{ kHz}$	
Reference Level Range	(Input Atten 0 dB to 50 dB)	
Preamplifier OFF Log	-64 dBm to +40 dBm (0.1 dB step)	+46 dBμV to +150 dBμV
Linear Preamplifier ON Log	+141.1 μV to +22.36 V (Input Atten 0 dB to 10 dB)	+198.4 μV to 31.44 V
Linear	-89 dBm to -25 dBm (0.1 dB step)	+21 dBμV to +85 dBμV
	+7.934 μV to +12.57 mV	+11.16 μV to +17.68 mV
Input Attenuator Range	0 dB to 50 dB (10 dB step)	

Sweep	
Sweep Time	50ms to 1000s 50 μs to 1000s(ZERO span)
Accuracy	$\leq \pm 5\%$
Trigger mode	FREE RUN, SINGLE, VIDEO, EXT, TV

Demodulation	
Spectrum Demodulation	AM and FM (FM is at RBW $\geq 3 \text{ kHz}$)
Modulation Type	Speaker and phone jack with volume control
Audio Output	

Dynamic Range	U3641	U3641N
Displayed Average Noise Level	(RBW 1 kHz, VBW 10 Hz, Input atten 0 dB, $f \geq 1 \text{ MHz}$)	
Preamplifier OFF	-117 dBm+ 2.7f (GHz) dB	-8 dBμV + 2.7f (GHz) dB
Preamplifier ON	-135 dBm + 4.3f (GHz) dB	-22 dBμV + 3.0f (GHz) dB
Gain Compression	(Input atten 0dB, $f \geq 10 \text{ MHz}$)	
Preamplifier OFF (mixer input level)	$> -10 \text{ dBm}$	$> +100 \text{ dBμV}$
Preamplifier ON (RF input level)	$> -40 \text{ dBm}$	$> +80 \text{ dBμV}$
Spurious Response	(Input atten 0 dB, $f \geq 10 \text{ MHz}$)	
Preamplifier OFF Second Harmonic Distortion	$\leq -70 \text{ dB}(-30 \text{ dBm input})$	$\leq -70 \text{ dB}(+78 \text{ dBμV input})$
Third Order Intermodulation Distortion	$\leq -70 \text{ dB}(-30 \text{ dBm input})$ 2-tone frequency separation $> 10 \text{ kHz}$	$\leq -70 \text{ dB}(+78 \text{ dBμV input})$
Residual Responses	(Input atten 0 dB, $f \geq 1 \text{ MHz}$)	
Preamplifier OFF	$\leq -100 \text{ dBm}$, 50 Ω	$\leq +10 \text{ dBμV}$, 75 Ω
Preamplifier ON	$\leq -105 \text{ dBm}$, 50 Ω	$\leq +5 \text{ dBμV}$, 75 Ω

Amplitude Accuracy	U3641	U3641N
Frequency Response	20°C to 30°C, referenced to 30MHz and after calibration	
Preamplifier OFF (Input atten 10dB)	$\leq \pm 1.0 \text{ dB}$ (100 kHz to 2.7 GHz)	$\leq \pm 1.0 \text{ dB}$ (100 kHz to 2.2 GHz)
Preamplifier ON (Input atten 0dB)	$\leq \pm 2.0 \text{ dB}$ (9 kHz to 3.0 GHz) $\leq \pm 1.0 \text{ dB}$ (100 kHz to 2.7 GHz) $\leq \pm 2.0 \text{ dB}$ (9 kHz to 3.0 GHz)	$\leq \pm 1.0 \text{ dB}$ (100 kHz to 2.2 GHz)
Calibration Signal Accuracy	-20 dBm $\pm 0.3 \text{ dB}$	+90.5 dBμV $\pm 0.3 \text{ dB}$
IF Gain Uncertainty	$\leq \pm 0.5 \text{ dB}$ (after automatic calibration)	
Scale Fidelity	(after automatic calibration)	
Log	$\leq \pm 1.5 \text{ dB}/90 \text{ dB}$ $\leq \pm 1.0 \text{ dB}/10 \text{ dB}$ $\leq \pm 0.2 \text{ dB}/1 \text{ dB}$ $\leq \pm 5\%$ of reference level, RBW $\geq 3 \text{ kHz}$	
Linear		
Input Attenuator Switching Accuracy	(10dB reference, 20dB to 50dB setting) $\leq \pm 1.0 \text{ dB}$ (100 kHz to 2.7 GHz) $\leq \pm 1.5 \text{ dB}$ (9kHz to 3.0 GHz)	$\leq \pm 1.0 \text{ dB}$ (100 kHz to 2.2 GHz)
Resolution Bandwidth Switching Uncertainty	(after automatic calibration) $\leq \pm 1.0 \text{ dB}$ at RBW 3 MHz as reference	

Inputs & Outputs	
RF Input	N type jack U3641 : 50 Ω (nominal) U3641N : 75 Ω (nominal) Preamplifier OFF VSWR ≤ 1.5 (100 kHz to 2 GHz) VSWR ≤ 2.0 (9 kHz to 3.0 GHz (U3641) / 2.2 GHz(U3641N)) (Input atten $\geq 10 \text{ dB}$ to 50dB) Preamplifier ON VSWR ≤ 2.5 (10 MHz to 3.0 GHz (U3641) / 2.2 GHz(U3641N), Input atten $\geq 0 \text{ dB}$)
Connector	
Impedance	
Preamplifier	
10 MHz Reference Input	BNC jack, rear panel 500 Ω (nominal) Input Range 0 dBm to +16 dBm
Connector	
Impedance	
Input Range	
Video Output	BNC jack, rear panel 75 Ω (nominal) AC coupled approx. 1 V _{P-P} , 75 Ω (Composite video signal)
Connector	
Impedance	
Amplitude	

Specifications

Inputs & Outputs	
External Trigger Input Connector Impedance Trigger Level	BNC jack, rear panel 10 k Ω (nominal) DC coupled TTL level
Gate Input Connector Impedance Sweep Stop Sweep Continue	BNC jack, rear panel 10 k Ω (nominal) during TTL low level during TTL high level
Phone Output Connector Power Output	Subminiature Monophonic jack, front panel 0.2 W, 8 Ω (nominal)
GPIO interface Plotter Printer	IEEE-488, bus Connector HP-GL commands (682-XA) PCL commands
RS232C Printer	D-SUB 9 pin, rear panel ESC/P commands
Power Input Battery mounter	AC/ DC adapter(A08364) or battery (option)

Controller (OPT15 only)	
BASIC program loading	Loads a program from a memory card (JEIDA-Ver.4.1/PCMCIA Rel. 2.0 or later).
BASIC program execution	Executes a BASIC program from a memory card or the flash memory in the unit.
BASIC program creation and editing	With an external terminal connected, programs can be created and edited.
I/O	GPIO : Allows control of external instruments and control from external hosts. RS232C : Allows programs to be created and edited with an external terminal connected.
Recording/storage	Allows data and programs to be recorded/stored in and loaded from a memory card (JEIDA-Ver.4.1/PCMCIA Rel. 2.0 or later).

High-Stability Reference Source(OPT20 only)	
Frequency	10MHz
Frequency Accuracy	$\pm 2 \times 10^{-8}$ / day $\pm 1 \times 10^{-7}$ / year

Narrow RBW (OPT26 only)	
Resolution Bandwidth (3 dB) Range Bandwidth accuracy Selectivity	300Hz, 100Hz $\leq \pm 20$ % $\leq 15:1$ (60 dB : 3 dB)

TV Demodulation Function (OPT 72 only)	
TV demodulation Demodulation type TV standard Demodulation output	NTSC, PAL, SECAM M, B/G, D/K/K', I, L/L' Video, Sound
TV Image Demodulation Output Connector Impedance Amplitude	BNC jack, rear panel 75 Ω (nominal) DC coupled approx. 1 V _{P-P} , 75 Ω
TV Sound Demodulation Output Connector Impedance	pin jack, rear panel 1 k Ω (nominal) AC coupled
TV Image Signal Input Connector Impedance Input level	BNC jack, rear panel 75 Ω (nominal) AC coupled about 1 V _{P-P}
TV Sound Signal Input Connector Impedance	pin jack, rear panel 1k Ω (nominal) AC coupled

Tracking Generator Function (OPT 74 only)	
Frequency range	100 kHz to 2.2 GHz
Output level range	U3641 ; 0 dBm to -31 dBm, 1 dB steps U3641N ; 105dB μ V to 74 dB μ V, 1dB step
Output level accuracy	$\leq \pm 0.5$ dB (at 30 MHz, -10dBm(U3641)/95dBV(U3641N), 20°C to 30°C)
Output level flatness	$\leq \pm 0.7$ dB (100 kHz to 1 GHz) $\leq \pm 1.5$ dB (100 kHz to 2.2 GHz) (U3641 ; at -10 dBm, 30 MHz reference) (U3641N ; at 95dB μ V, 30MHz reference)
Output level switching accuracy	$\leq \pm 1.0$ dB (100 kHz to 1 GHz) $\leq \pm 2.0$ dB (100 kHz to 2.2 GHz) (U3641; at -10 dBm reference) (U3641N ; at 95dB μ V reference)
Output spurious	Harmonic < -20 dBc Non-harmonic < -30 dBc
TG leakage	U3641 ; ≤ -95 dBm U3641N ; ≤ 16 dB μ V
TG output Connector Impedance (≤ 10 dBm output)	N type jack U3641 ; 50 Ω (nominal) U3641N ; 75 Ω (normal) VSWR ≤ 1.5 (100 kHz to 2 GHz) VSWR ≤ 2.0 (100 kHz to 2.2GHz) (U3641 ; ≤ 10 dBm output) (U3641N ; ≤ 95 dB μ output)

Channel Input Setting (OPT 78 only)	
Channel setting	Channel setting for VHF, UHF, CATV, BS and CS. Two user channels are available and 99 channels can be registered for each channel

OPT 78 is included in OPT 72.

Cannot be mounted at the same time as the OPT 60.

CDMA Measurement (OPT 60 only)	
Measurement standard	Conforms to CDMA standard IS95 and J-STD-008
Channel input function US cellular KOREA cellular CHINA cellular JAPAN cellular US PCS KOREA PCS USER TABLE	1 to 799, 990 to 1023 1 to 799, 990 to 1023 0 to 1000, 1329 to 2047 1 to 799, 801 to 1039, 1041 to 1199 0 to 1199 0 to 1300 99 channels can be created.
Channel power measurement Absolute accuracy Relative accuracy	(After automatic calibration, automatic setting, preamplifier OFF, -50 dBm/1.23MHz to +20 dBm/1.23 MHz, within 80 dB range) BNC jack, rear panel $\leq \pm 2.0$ dB (15 °C to 35 °C) $\leq \pm 2.5$ dB (0 °C to 50 °C) $\leq \pm 0.5$ dB (15 °C to 35 °C) $\leq \pm 0.8$ dB (0 °C to 50 °C)
Occupied frequency bandwidth (OBW) measurement	Occupation ratio can be set to 10.0% to 99.8%
Adjacent channel leakage power (ACP) measurement	Template display (After making measurement the specified number of times, calculates the reference power and draws a template.) Standard template, user template selectable PASS/FAIL function
Spurious emission (in-band) measurement (relative value)	Template display (After making measurement the specified number of times, calculates the reference power and draws a template.) Standard template, user template selectable PASS/FAIL function

The OPT 72 and OPT 78 cannot be mounted at the same time.

Cannot be mounted at the same time as the OPT 60.

Specifications/Options/Accessories

General Specifications	
Environment Temperature	
Operating Temperature	0°C to 50°C, humidity 85% or less
Non-operating Temperature	-20°C to +60°C
Power Supply	
External DC Input	Connector XLR 4 pin Voltage +10V to +16V Automatically selections between 100 VAC and 200 VAC Operation at 100 VAC : Voltage 100 V to 120 V Frequency 50 Hz / 60 Hz Operation at 220 VAC: Voltage 220 V to 240 V Frequency 50 Hz / 60 Hz
AC Input	
Power consumption	Operation at DC : 60 W or less AC adaptor use : 100VA or less
Mass	(Without options, accessories, carrying belts, batteries AC adaptor) 6.9 kg or less
Dimensions	approx. 148 (H) × 291 (W) × 330 (D) mm (without feet or connector)
IC Memory Card connector	2 slots JEIDA-Ver.4.1 PCMCIA Rel.2.0 Type 1
Standard accessories	
<ul style="list-style-type: none"> Power cable : A01412 N-BNC connector adaptor : JUG-201A/U (U3641; One) NC-BNC connector adaptor : BA-A165 (U3641N; One) N-C15 connector adaptor : NCP-NFJK (U3641N; One) AC-DC adaptor : A08364 Carrying belt Operation manual 	

Options

Options (sold separately)

OPT 3641 +15 controller option
 OPT 3641N +15 controller option
 OPT 3641 +20 High-stability reference option
 OPT 3641N + 20 High -stability reference option
 OPT 3641 +26 Narrow RBW option
 OPT 3641N + 26 Narrow RBW option
 OPT 3641 + 60 CDMA option
 OPT 3641 + 72 TV demodulation option
 OPT 3641N + 72 TV demodulation option
 OPT 3641 + 74 Tracking generator option
 OPT 3641N + 74 Tracking generator option
 OPT 3641 + 78 Channel input setting option
 OPT 3641N + 78 Channel input setting option

Accessories



Accessories (sold separately)

R16072 Transit case
 R16216A Carrying case
 R16601 Display hood
 A02806 Front cover
 PROPAC14BATT Batteries
 DUAL2401CHARGER Chargers
 A09507 64K byte SRAM memory card
 A09508 256K byte SRAM memory card
 A09509 2M byte SRAM memory card
 A01434 DC cable

Application software (sold separately)

CATV Measurement software	PU3641400-IC
GSM/DCS1800-MS software	PU36410300-IC
GSM/DCS1800-BS software	PU36410310-IC
DCS1900-MS software	PU36410500-IC
DCS1900-BS software	PU36410510-IC



ADVANTEST CORPORATION
Shinjuku-NS building, 4-1
Nishi-Shinjuku 2-chome
Shinjuku-ku, Tokyo 163-0880,
Japan
Tel: +81-3-3342-7500
Fax: +81-3-5381-7661
<http://www.advantest.co.jp>

Advantest (Singapore) Pte. Ltd.
438A Alexandra Road,
#8-03/06 Alexandra Technopark
Singapore 119967
Tel: +65-274-3100
Fax: +65-274-4055

Tektronix Inc. (North America)
P. O. Box 500 Howard Vollum
Industrial Park Beaverton,
Oregon 97077-0001 U. S. A.
Tel: +1-800-426-2200
Fax: +1-503-627-4090

Rohde & Schwarz Engineering and
Sales GmbH (Europe)
Mühldorfstr. 15
(P. O. B. 80 14 29, D-81614
Munich) D-81671 München
Tel: +49-89-4129-3711
Fax: +49-89-4129-3723