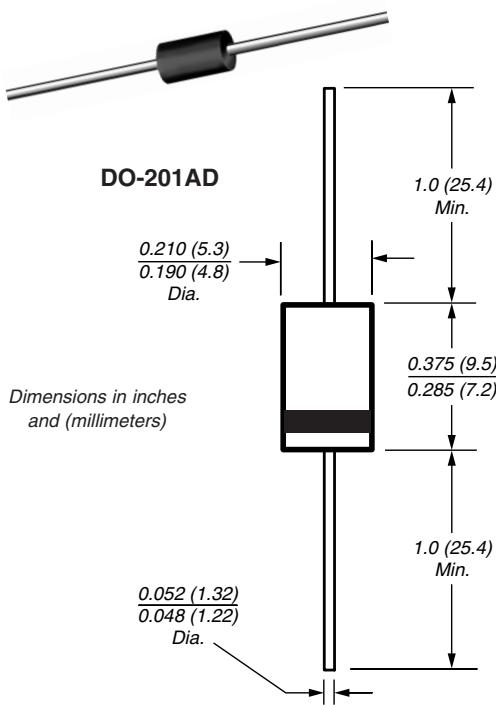


## General Purpose Plastic Rectifiers

**Reverse Voltage**

50 to 1000V

**Forward Current 3.0A**


### Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High surge current capability
- Construction utilizes void-free molded plastic technique
- 3.0 Ampere operation at  $T_L=105^\circ\text{C}$  with no thermal runaway
- Typical  $I_R$  less than  $0.1\mu\text{A}$
- High temperature soldering guaranteed:  $250^\circ\text{C}/10$  seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

### Mechanical Data

**Case:** JEDEC DO-201AD, molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.04oz., 1.1g

### Maximum Ratings & Thermal Characteristics

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

Parameter	Symb.	1N 5400	1N 5401	1N 5402	1N 5403	1N 5404	1N 5405	1N 5406	1N 5407	1N 5408	Unit
* Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	300	400	500	600	800	1000	V
* Maximum RMS voltage	$V_{RMS}$	35	70	140	210	280	350	420	560	700	V
* Maximum DC blocking voltage to $T_A = 150^\circ\text{C}$	$V_{DC}$	50	100	200	300	400	500	600	800	1000	V
* Maximum average forward rectified current 0.5" (12.5mm) lead length at $T_L = 105^\circ\text{C}$	$I_{F(AV)}$	3.0								A	
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at $T_L=105^\circ\text{C}$	$I_{FSM}$	200								A	
* Maximum full load reverse current, full cycle average 0.5" (12.5mm) lead length at $T_L = 105^\circ\text{C}$	$I_{R(AV)}$	500								$\mu\text{A}$	
* Typical thermal resistance <sup>(1)</sup>	$R_{\theta JA}$	20								$^\circ\text{C/W}$	
Maximum DC blocking voltage temperature	$T_A$	+150								$^\circ\text{C}$	
* Operating junction and storage temperature range	$T_J, T_{STG}$	−50 to +170								$^\circ\text{C}$	

### Electrical Characteristics

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

* Maximum instantaneous forward voltage at 3.0A	$V_F$	1.2								V
* Maximum DC reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_A = 150^\circ\text{C}$	$I_R$	5 500								$\mu\text{A}$
Typical junction capacitance at 4.0V, 1MHz	$C_J$	30								pF


Note: (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted with 0.8 x 0.8" (20 x 20mm) copper heatsinks

\*JEDEC registered values


## Ratings and Characteristic Curves

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 – Forward Current Derating Curve**

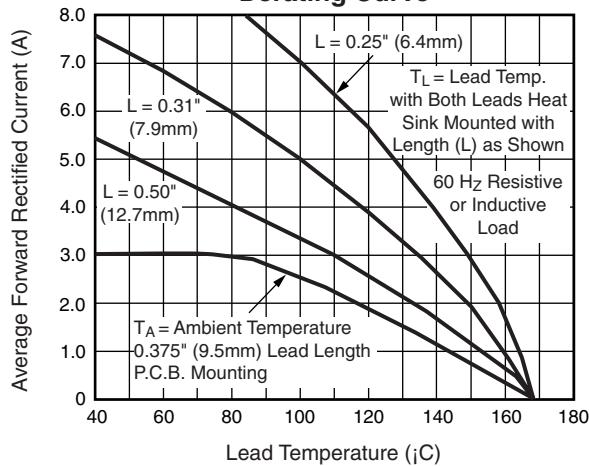


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current**

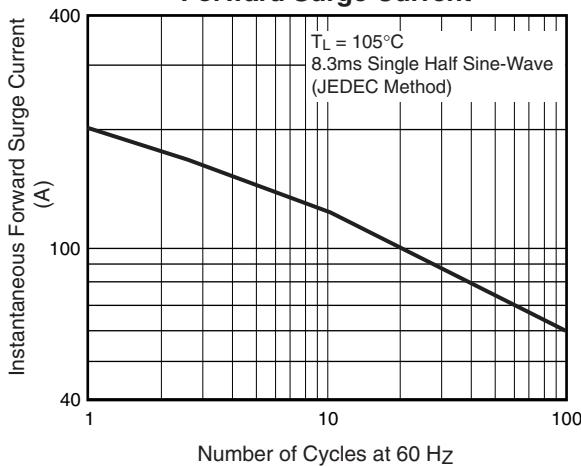


**Fig. 3 – Typical Instantaneous Forward Characteristics**

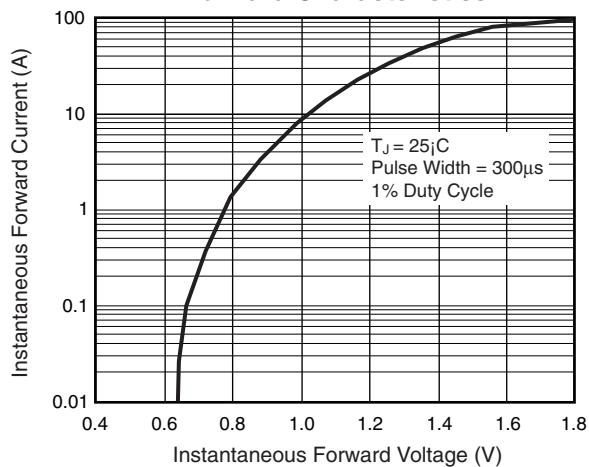

**Fig. 4 – Typical Reverse Characteristics**

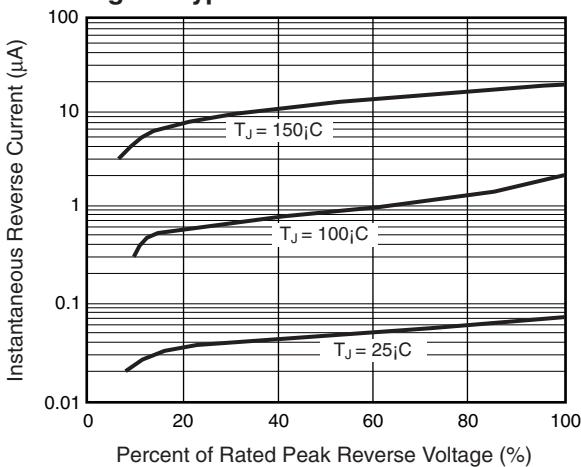

**Fig. 5 – Typical Junction Capacitance**

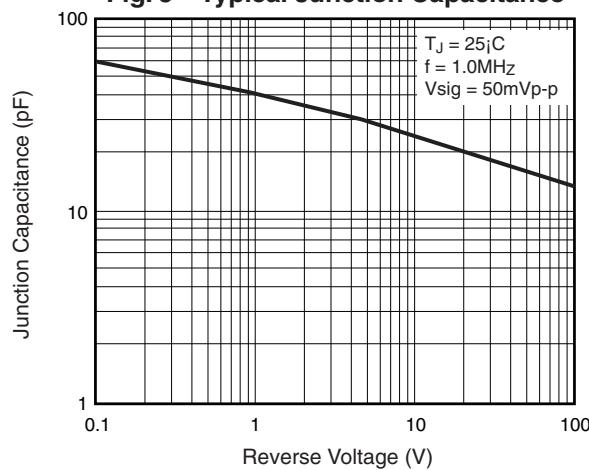

**Fig. 6 – Typical Transient Thermal Impedance**

