


### HOLE LAYOUT

(Shown as seen from the bottom)

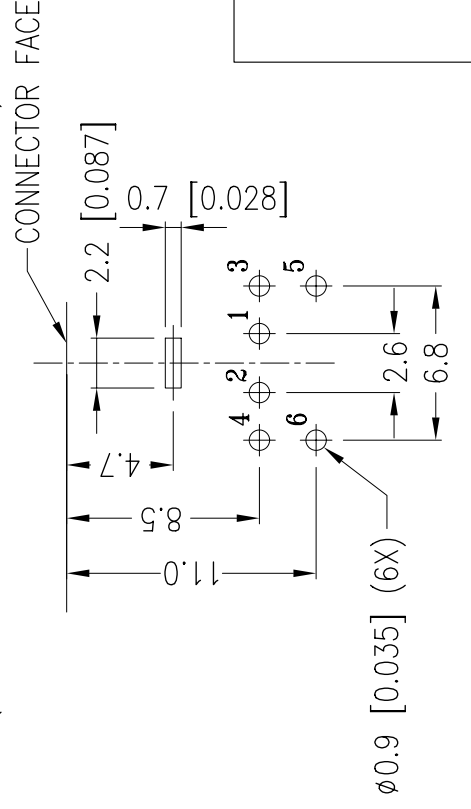

### SPECIFICATIONS:

RATING: 100V AC 1A MAX OR  
12V DC 2A MAX

INSULATION RESISTANCE:  
50 MOHM MIN AT 250V DC

DIELECTRIC STRENGTH:  
250V AC, 1 MINUTE

CONTACT RESISTANCE:  
30 mOHM MAX

INSERTION FORCE:  
4.5KG MAX

WITHDRAWAL FORCE:  
0.9KG~3KG



9615 SW Allen, Suite 103  
Beaverton, OR 97005  
Phone: (503) 643-4899  
Fax: (503) 643-6129  
Website: [www.cuistack.com](http://www.cuistack.com)

TITLE:

MINIATURE CIRCULAR CONNECTOR w/o SHIELD

PART NO.

MD-60S

UNITS:

MM [INCHES]

DRAWN BY:

APPROVED BY:

SCALE:

3X