

SB10-05PCP

Schottky Barrier Diode

50V, 1A Rectifier

Applications

· High frequency rectification (switching regulators, converters, choppers).


Features

- · Low forward voltage (V_F max=0.55V).
- · Fast reverse recovery time (trr max=10ns).
- · Low switching noise.
- · Low leakage current and high reliability due to highly reliable planar structure.

Package Dimensions

unit:mm

1163A

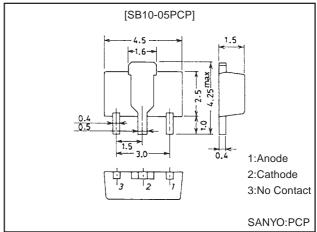

Specifications


Absolute Maximum Ratings at Ta = 25°C


Parameter	Symbol	Conditions	Ratings	Unit
Repetitive Peak Reverse Voltage	V _{RRM}		50	V
Nonrepetitive Peak Reverse Surge Voltage	VRSM		55	V
Average Output Current	Io		1	Α
Surge Forward Current	IFSM	50Hz sine wave, 1 cycle	10	Α
Junction Temperature	Tj		-55 to +125	°C
Storage Temperature	Tstg		-55 to +125	°C

Electrical Characteristics at Ta = 25°C

Parameter		Conditons		Ratings		
	Symbol		min	typ	max	Unit
Reverse Voltage	V _R	I _R =300μA	50			V
Forward Voltage	VF	I _F =1A			0.55	V
Reverse Current	IR	V _R =25V			80	μA
Interterminal Capacitance	С	V _R =10V, f=1MHz		52		pF
Reverse Recovery Time	trr	I _F =I _R =100mA, See specifaied Test Circuit			10	ns
Thermal Resistance	Rthj-a (1)			300		°C/W
	Rthj-a (2)	Mounted on ceramic board (250mm ² ×0.8mm)		110		°C/W

trr Test Circuit

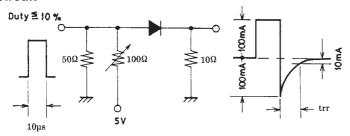

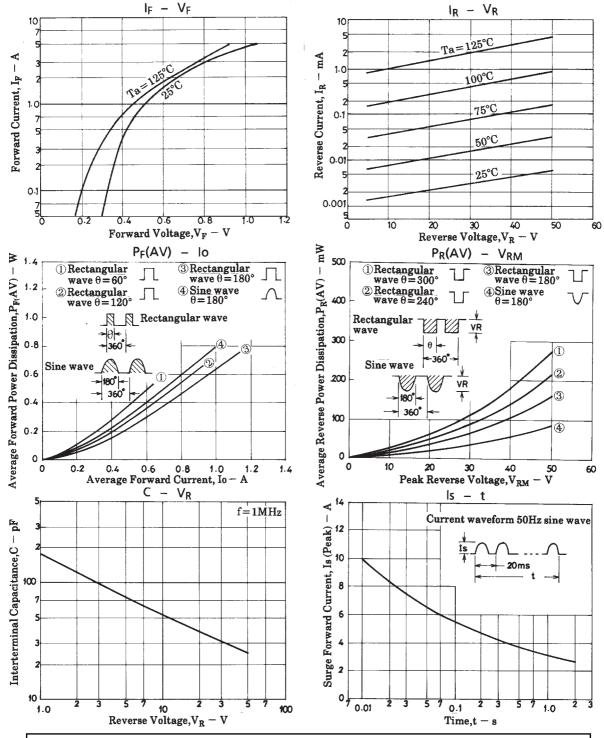

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibilty for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of April, 1998. Specifications and information herein are subject to change without notice.